

# Mounting The Time Kiosk

1 To mount the **ADP Kiosk** you'll need the following tools.



- A. Hammer
- B. Drill
- C. 3/8 Inch Drill Bit
- D. One-quarter Inch Drill Bit
- E. Screwdriver with Phillips Head
- F. Level
- G. Pen
- H. Stud Finder

## Mounting The Time Kiosk

- 2 After unboxing the mount remove the screw from the top of the mounting bracket to separate the two pieces. Then place the screw to the side as you will use this later to secure the ADP Kiosk.



- 3 Take the flat part of the mount and position it on the back of the kiosk so that it lines up with the four holes.



- 4 Make sure that the metal hooks are oriented downwards.



- 5 Then screw the four small silver screws into the holes to attach the mount to the device.



- 6 We also recommend using a stud finder and attaching one side of the mount to a stud for increased stability and security.



- 7 Take the box Mount and position it on the wall and make sure that one side of the bracket is between your two stud lines.



# Mounting The Time Kiosk

- 8 Use a level to confirm that everything is straight before you mark off the location for the screw holes.



- 9 Using the mount, hold it firmly in place and mark the location for the screw.



- 10** For any screws that are not going into a stud, create a hole for the drywall anchors using a one-quarter inch drill bit




- 11** For screws that are going into a stud use a 3/8 inch drill bit to create pilot holes in the stud.



## Mounting The Time Kiosk

- 12** Next, add the anchors to the drywall and push in the anchor as far as you can and then finish off by lightly hammering until it is flush with the wall.

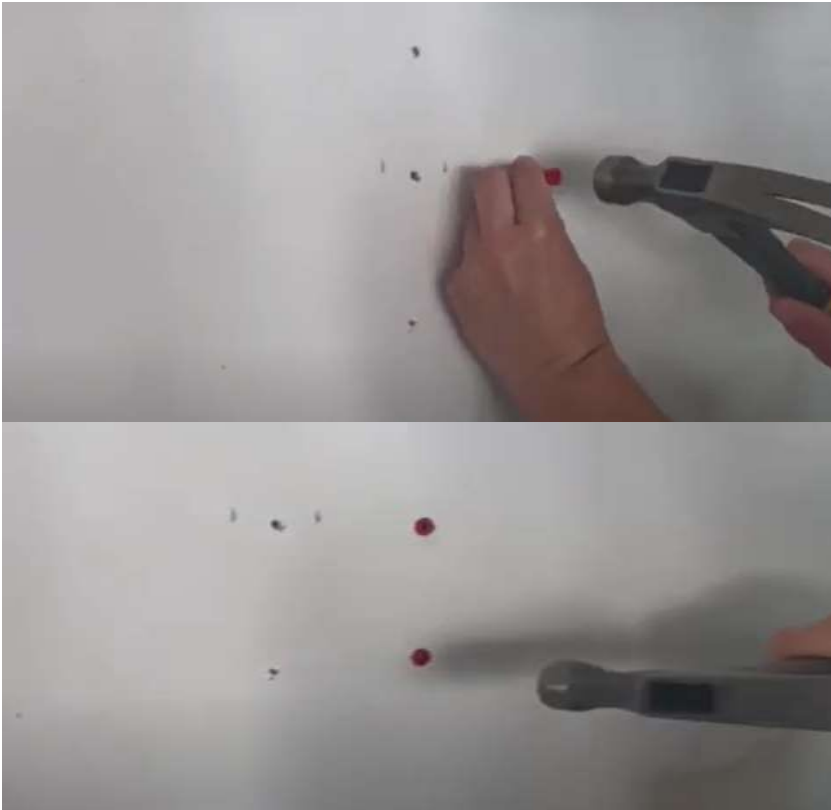

- 13** Next, place the box mount over the holes and screw it into the pilot holes and anchor holes.



## Mounting The Time Kiosk

- 14** You are now ready to mount the ADP Kiosk to the wall. Hook in the two bottom hooks first and everything should fall into place.



- 15** Finally secure the device to the mount by adding in the screw we took out in the beginning. If you ever need to remove the device from the wall, just remove the screw.





- 16** If you also need to change the angle of the device you can change this by loosening, repositioning, and tightening this screw on the side with the included Allen Wrench.



- 17** Any screws that are going into a stud use a 3/8 inch drill bit to create pilot holes in the stud.

